

DH-IPC-HDBW2230E-S-S2

2MP Lite IR Fixed-focal Dome Network Camera



Series Overview

With upgraded H.265 encoding technology, Dahua Lite series network camera has efficient video encoding capacity, which saves bandwidth and storage space. This camera adopts the latest starlight technology and displays better color image in the condition of low illumination. It supports SD card storage, dust-proof function, waterproof function and vandal-proof function, complying with the standards of IP67 and IK10 (Supported by some select models).

Functions

Smart H.265+ & Smart H.264+

With advanced scene-adaptive rate control algorithm, Dahua smart encoding technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

Starlight

With advanced image processing technology and optical technology, Dahua Starlight technology can provide clear colorful video in the environment of low illuminance. It widely applies to various environments of low illuminance.

IVS

With advanced video algorithm, Dahua IVS technology supports intelligent functions, such as tripwire and intrusion.

Cyber Security

Dahua network cameras employ a series of security technologies, including security authentication and authorization, access control protocols, trusted protection, encrypted transmission and encrypted storage. These technologies improve the camera's defense against external cyber threats and prevent malicious programs from compromising the device.

2MP 1/2.8" CMOS image sensor, low luminance, and high definition image.

Outputs max. 2MP (1920 × 1080) @25/30 fps.

H.265 codec, high compression rate, ultra-low bit rate.

Built-in IR LED, and the max. illumination distance is 30 m.

ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments.

Rotation mode, DWDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes.

Intelligent monitoring: Intrusion, tripwire.

Abnormality detection: Motion detection, privacy masking, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, and voltage detection.

Max. 256 G micro SD card.

12V DC/PoE power supply.

IP67, IK10 protection.



Protection (IP67, IK10, Wide Voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normal after soaking in 1 m deep water for 30 minutes.

IK10: The enclosure can stand the punch more than 5 times from a 5 kg hammer falling from a height of 40 cm (Impact energy is 20J).

Wide voltage: The camera allows ±30% (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

Technical Specification						
Camera						
Image Sensor		1/2.8" CMOS				
Max. Resolution		1920 (H) × 1080 (V)				
ROM		128 MB				
RAM		128 MB				
Scanning System		Progressive				
Electronic Shutter Speed		Auto/Manual 1/3 s~1/100,000 s				
Min. Illumination		0.005 Lux@F1.6 (Color, 30 IRE) 0.0005 Lux@F1.6 (B/W, 30 IRE) 0 Lux (Illuminator on)				
S/N Ratio		> 56 dB				
Illumination Distance		30 m (98.43 ft) (IR)				
Illuminator On/Off Control		Auto; manual				
Illuminator Number		3 (IR LED)				
Pan/Tilt/Rotation Range		Pan: 0°~355° Tilt: 0°~65° Rotation: 0°~355°				
Lens						
Lens Type		Fixed-focal				
Lens Mount		M12				
Focal Length		2.8 mm; 3.6 mm				
Max. Aperture		2.8 mm: F1.6 3.6 mm: F1.6				
Field of View		2.8 mm: Horizontal: 108°; Vertical: 56°; Diagonal: 128° 3.6 mm: Horizontal: 88°; Vertical: 44°; Diagonal: 105°				
Iris Control		Fixed				
Close Focus Distance		2.8 mm: 0.6 m (1.97 ft) 3.6 mm: 1.3 m (4.27 ft)				
DORI Distance	Lens	Detect	Observe	Recognize	Identify	
	2.8 mm	38.6 m (126.64 ft)	15.4 m (50.52 ft)	7.7 m (25.26 ft)	3.9 m (12.80 ft)	
	3.6 mm	58.9 m (193.24 ft)	23.6 m (77.43 ft)	11.8 m (38.71 ft)	5.9 m (19.36 ft)	
Smart Event						
IVS		Tripwire; intrusion				
Video						
Video Compression		H.265; H.264; H.264B; MJPEG (Only supported by the sub stream)				
Smart Codec		Smart H.265+; Smart H.264+				
Video Frame Rate		Main stream: 1920 × 1080@1~25/30 fps Sub stream: 704 × 576@1~25 fps 704 × 480@1~30 fps *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.				
Stream Capability		2 streams				

Resolution	1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)
Bit Rate Control	CBR/VBR
Video Bit Rate	H.264: 32 kbps~6144 kbps H.265: 12 kbps~6144 kbps
Day/Night	Auto (ICR)/Color/B/W
BLC	Yes
HLC	Yes
WDR	DWDR
White Balance	Auto; natural; street lamp; outdoor; manual; regional custom
Gain Control	Auto; manual
Noise Reduction	3D NR
Motion Detection	OFF/ON (4 areas, rectangular)
Region of Interest (RoI)	Yes (4 areas)
Smart Illumination	Yes
Image Rotation	0°/90°/180°/270°(Support 90°/270°with 1080p resolution and lower)
Mirror	Yes
Privacy Masking	4 areas

Alarm	
Alarm Event	No SD card; SD card full; SD card error; network disconnection; IP conflict; illegal access; motion detection; video tampering; tripwire; intrusion; voltage detection; security exception

Network	
Network Port	RJ-45 (10/100 Base-T)
SDK and API	Yes
Cyber Security	Video encryption; firmware encryption; configuration encryption; Digest; WSSE; account lockout; security logs; IP/MAC filtering; generation and importing of X.509 certification; syslog; HTTPS; 802.1x; trusted boot; trusted execution; trusted upgrade
Network Protocol	IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; PPPoE; Bonjour
Interoperability	ONVIF (Profile S/Profile G/Profile T); CGI; P2P; Milestone
User/Host	20 (Total bandwidth: 48 M)
Storage	FTP; SFTP; Micro SD card (support max. 256 G); NAS
Browser	IE Chrome Firefox
Management Software	Smart PSS; DSS; DMSS
Mobile Client	IOS; Android

Certification	
Certifications	CE-LVD: EN 62368-1 CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU FCC: 47 CFR FCC Part 15, Subpart B

Power

Power Supply	12 V DC/PoE (802.3af)
Power Consumption	Basic: 1.8 W (12 V DC); 2.5 W (PoE) Max. (ICR + H.265 + max. resolution + main stream + IR intensity + DWDR + IVS): 4.6 W (12 V DC); 5.4 W (PoE)

Environment

Operating Temperature	<div> <div></div> <div> <div> <div></div> <div></div> </div> </div> </div> <div> <div> <div></div> <div></div> </div> </div>
Operating Humidity	≤ 95%
Storage Temperature	<div> <div></div> <div> <div> <div></div> <div></div> </div> </div> </div> <div> <div> <div></div> <div></div> </div> </div>
Protection	IP67; IK10

Structure


Casing	Metal
Product Dimensions	81 mm × Φ109.9 mm (3.2"×Φ4.3")
Net Weight	0.35 kg (0.8 lb)
Gross Weight	0.49 kg (1.1 lb)

Ordering Information


Type	Model	Description
2MP Camera	DH-IPC-HDBW2230E-S-S2	2MP Lite IR Fixed-focal Dome Network Camera
Accessories (optional)	PFA136	Junction Box
	PFB203W	Wall Mount Bracket
	PFA152-E	Pole Mount Bracket
	PFA106	Mount Adapter
	PFB220C	Ceiling Mount Bracket
	PFM321D	12V DC 1A Power Adapter
	PFM900-E	Integrated Mount Tester

Accessories


Optional:




PFA136
Junction Box




PFB203W
Wall Mount Bracket




PFA152-E
Pole Mount Bracket




PFA106
Mount Adapter




PFB220C
Ceiling Mount Bracket



PFM321D
12V DC 1A Power Adapter



PFM900-E
Integrated Mount Tester

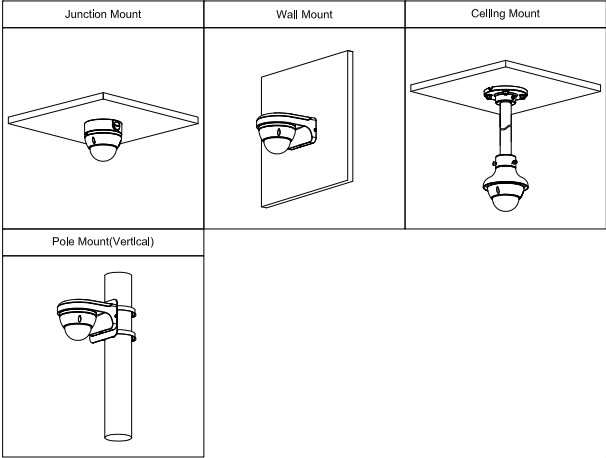

Dimensions (mm[inch])

